

(12) EUROPEAN PATENT APPLICATION

(43) Date of publication:
02.04.1997 Bulletin 1997/14

(51) Int Cl.®: H04B 3/23

(21) Application number: 96307072.7

(22) Date of filing: 27.09.1996

(84) Designated Contracting States:
DE ES FR GB IT

• Hazen, Ramon B.
North Redington Beach, Florida 33708 (US)
• Scott, Robert Earl
Indian Rocks Beach, Florida 34635 (US)

(30) Priority: 29.09.1995 US 536916

(71) Applicant: Paradyne Corporation
Largo, Florida 33779-2826 (US)

(74) Representative: Jehan, Robert et al
Williams, Powell & Associates,
34 Tavistock Street
London WC2E 7PB (GB)


(72) Inventors:
• Betts, William Lewis
St. Petersburg, Florida 33703 (US)

(54) Echo canceller using initial training

(57) A far-end modem (300) transmits a "pilot tone" during the time that a near-end modem (100) is training its echo canceller (650). Correspondingly, the near-end

modem (100) is modified to notch or filter out this pilot tone from the received signal. The filtered received signal is then used by the near-end modem (100) to train its echo canceller (650).

FIG. 6

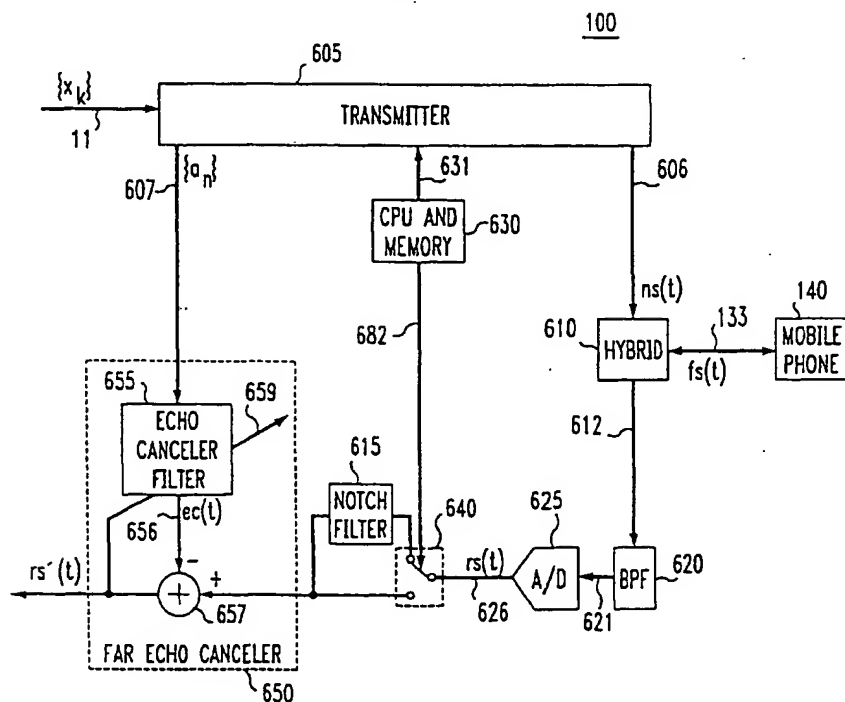

Description

The present invention relates to data communications equipment, for example modems such as echo-cancelling or reducing modems.

Today, the North American cellular system is predominately an analog system sometimes referred to as AMPS (Advanced Mobile Phone Service). The corresponding cellular communications channel is sometimes referred to as an "impaired channel" since it is affected by a number of channel impairments like Rayleigh fading, co-channel interference, etc., that increase the error rate and, thus, degrade the overall performance of the mobile connection. This is in contrast to a land-line communications channel, where the predominant impairment is additive white gaussian noise (AWGN). Those in the art have realized that one way to improve data transmission rates in the cellular environment is to use a data protocol that is better suited to combating the effects of the cellular environment over the cellular portion of the data connection. One example of a cellular-oriented protocol is the "Enhanced Throughput Cellular" (ETC) protocol, developed by AT&T Paradyne.

Nevertheless, even with a cellular-oriented protocol, impairments in the cellular channel continue to limit the effective data rate over the cellular channel. For example, reliable, i.e., consistent, data transmission over 9600 bits per second (bps) is difficult to maintain.

The present invention seeks to provide improved data communication. According to an aspect of the present invention, there is provided data communication apparatus as specified in claim 1 or 2.

According to another aspect of the present invention, there is provided a method of training an echo canceler as specified in claim 5 or 7.

Notwithstanding the above-mentioned impairments present in the cellular channel, it has been discovered that there is a non-linearity in the cellular AMPS network which affects the ability to reliably maintain cellular data rates over 9600 bps. In particular, when a cellular modem is performing training with a far-end PSTN modem, the cellular AMPS network distorts a far-end echo signal that is used by the cellular modem to train its echo canceler. It is estimated that this distortion of the far-end echo signal occurs in approximately 40% of the AMPS cellular infrastructure. The source of the distortion of the far-end echo signal is due to a non-linear compander in some base-station radios and the half-duplex approach that modems use to train echo cancelers. The result is that the echo canceler of the cellular modem is not properly trained thereby causing a residual echo signal to exist. This residual echo signal limits the maximum cellular data rate to 9600 bps (often, this cellular data rate is reduced to 7200 bps). Without this residual echo signal, the cellular modem and PSTN modem could often achieve a data rate of 14,400 bps (and even higher in the future).

Therefore, the preferred method and apparatus reduces the residual echo signal, which is effectively caused by the above-mentioned distortion of the far-end echo signal during training. In particular, during the above-mentioned half-duplex training phase a far-end modem does not remain silent but, instead, transmits a pilot tone to the near-end modem during the time that the near-end is training its echo canceler. This pilot tone is of a high enough signal level to cause the above-mentioned compander to achieve its linear range. As a result, the preferred embodiment can eliminate the incorrect training caused by the distortion of the far-end echo signal, thereby providing the ability to reliably maintain cellular data rates greater than 9600 bps.

In an embodiment, the PSTN modem transmits a "pilot tone" during the time that the cellular modem is training its echo canceler. This pilot tone is of a high enough signal level to cause the compander to achieve its linear range. The cellular modem is modified to notch, or filter, out this pilot tone from the received signal. The filtered received signal is then used by the cellular modem to train its echo canceler. Since the above-mentioned compander is now in the same linear range that it will be in when the both modems go into full-duplex mode, the echo canceler is properly trained to the far-end echo signal. Residual echo is thus eliminated and the modem can achieve its highest data rate.

An embodiment of the present invention is described below, by way of example only, with reference to the accompanying drawings, in which:

FIG. 1 is a block diagram of an embodiment of mobile data communications system;

FIG. 2 shows an illustrative portion of a training sequence;

FIG. 3 is a flow diagram of an illustrative method for use in an embodiment of originating modem;

FIG. 4 is a flow diagram of an illustrative method for use in an embodiment of answering modem;

FIG. 5 shows an illustrative portion of a training sequence as modified by the preferred method steps; FIG. 6 is an illustrative block diagram of a portion of an embodiment of cellular modem of the system of FIG. 1;

FIG. 7 is an illustrative block diagram of a portion of an embodiment of PSTN modem of the system of FIG. 1; and

FIGs. 8 - 10 show the preferred method steps when the cellular modem is the "answering" modem.

Other than the features of the preferred embodiments, the elements of FIG. 1 function as in the prior art and will not be described in detail. FIG. 1 shows a block diagram of a mobile data communications system that includes an embodiment of cellular modem 100. As shown, cellular modem 100 is coupled to mobile phone 140 for transmitting data signals to, and receiving data signals from, PSTN modem 300 via cell site transceiver

255, impaired channel 200, Mobile Telecommunications Switching Office (MTSO) 250, and PSTN 340. Both cellular modem 100 and PSTN modem 300 are also coupled to respective data terminal equipment (DTE) 10 and 30.

Before describing the preferred embodiment, the following is a brief overview of the operation of the mobile data communications system of FIG. 1 once a data connection is established, i.e., after training has been completed. A data signal is applied to cellular modem 100, via line 11, from DTE 10 for transmission to PSTN modem 300. Line 11 represents the signaling, electronics, and wiring, for conforming to a DTE/DCE (data communications equipment) interface standard like EIA RS-232. Cellular modem 100 modulates this data signal as is known in the art to, typically, a quadrature amplitude modulated (QAM) signal, which is provided via line 133 to mobile phone 140. Although not necessary, it is assumed for the purposes of this example that the modem signal is compatible with International Telecommunications Union (ITU) standard V.32bis. Mobile phone 140 further modulates this transmission signal onto a predefined cellular carrier to provide a cellular data signal to antenna 141. Cell site transceiver 255 receives the cellular data signal via antenna 251 and provides a received modem signal to MTSO 250 for transmission, via public-switched-telephone network 340, to a far-end data endpoint as represented by PSTN modem 300 and DTE 30. Ideally, the data signal received by DTE 30 from PSTN modem 300 is identical to the data signal provided by DTE 10 to cellular modem 100. Transmission of data signals in the opposite direction, i.e., from DTE 30 to DTE 10 occurs in a like fashion.

However, before establishing a data connection, modems, as known in the art, perform a standard sequence of signaling that is also referred to as handshaking or training. This signaling determines such parameters as data rate, modulation to use, and trains, or sets, what is known in the art as filter tap coefficient values for filters like echocancellers and equalizers, which combat interference and distortion effects caused by the communications channel. As known in the art, the training sequence for an echo canceler is performed half-duplex. Full-duplex training of the echo canceler, while theoretically possible, is not practical from a price/performance viewpoint in the design of data communications equipment.

Since different data communications standards like ITU V.32bis and ITU V.34 have different training sequences, a generalized representation of a training sequence comprising a number of phases is illustrated in FIG. 2. It is assumed that cellular modem 100 is the calling modem and that PSTN modem 300 is the answering modem. As shown in FIG. 2, the training sequence is initially full-duplex during phase "A." The latter is followed by a phase "B," which is half-duplex and is additionally divided into two portions: "B1" and "B2". In portion "B1," of phase "B," the called modem, PSTN modem

300, sends a signal to train the echo canceler of PSTN modem 300 while the cellular modem 100 is silent. Then, in portion "B2," of phase "B," the calling modem, cellular modem 100, sends a signal to train the echo canceler of cellular modem 100 while the far-end PSTN modem is silent. To complete the description of FIG. 2, after half-duplex training phase "B," both modems enter a subsequent full-duplex training phase "C," which is then followed by a "DATA" phase in which data is actually communicated between the two modems.

During the respective half-duplex training portions of phase "B," each modem uses the returned far-end echo signal to adjust the tap coefficients of its echo canceler. The far-end echo signal is a result of subsequent 4-wire to 2-wire signal conversion within the PSTN, as is known in the art. (It should be noted that other components are also adjusted during training, e.g., equalizer coefficients, etc. However, for the purposes of this example, only the echo canceler training is described.)

In the cellular network, the base station radio - cell site transceiver 255 - performs audio processing. One of the audio processing stages is a compander (not shown). The compander is linear over a given signal range. Unfortunately, it has been discovered that some companders are not linear in the signal range of the returned far-end echo signal during the half-duplex training phase. As a result, this non-linearity of the compander results in training the echo canceler of the cellular modem to a distorted far-end echo signal. However, when the cellular modem subsequently goes into full duplex mode, i.e., both transmitting a signal to, and receiving a signal from, the PSTN modem, the received signal level passing through cell site transceiver 255 causes the compander to operate in its linear range. This change in compander operation results in a gain change in the echo path that causes a degradation in echo canceler performance resulting in a large "residual echo" in the cellular modem. In other words, there is a loss of echo cancellation. This residual echo signal limits the maximum cellular data rate to 9600 bps (often, this cellular data rate is reduced to 7200 bps.). Without this residual echo signal, the cellular modem and PSTN modem could often achieve a data rate of 14,400 bps (and even higher in the future).

This problem can be solved by modems with a four-wire interface at the PSTN-side of the cellular data connection. For example, a cellular network that includes a cellular modem pool, as well as "mu-law" modem pools being installed at customer locations solve this problem. Unfortunately, a large number of cellular users will still be calling 2-wire PSTN modems for the foreseeable future. In addition, this problem could be solved by allowing continued adaptation of the echo canceler during data transmission. However, this adaptation process can be slow. Indeed, the above-mentioned co-pending patent application of Flanagan et al. provides a solution to, quickly adapt the coefficients of an echo canceler after half-duplex training. Unfortunately, some modems (as

represented by cellular modem 100) only adapt during the training sequence to conserve hardware requirements, such as memory, and thereby reduce the cost of the data communications equipment.

The preferred embodiment provides a method and apparatus for reducing the residual echo signal, which is effectively caused by the above-mentioned switching between a linear mode of operation and a nonlinear mode of operation of a network compander. In particular, during the above-mentioned half-duplex training phase a PSTN modem does not remain silent but, instead, transmits a pilot tone to the cellular modem during the time that the cellular modem is training its echo canceler. This pilot tone is of a high enough signal level to cause the above-mentioned compander to achieve its linear range. As a result, this embodiment can eliminate the incorrect training caused by the distortion of the far-end echo signal, thereby providing the ability to reliably maintain cellular data rates greater than 9600 bps.

In order to facilitate understanding of the preferred embodiments reference should now be made to FIGs. 3 and 4, which represent an illustrative methods for use in an originating modem and answering modem, respectively. For the purposes of this description, cellular modem 100 is illustratively the originating modem and PSTN modem 300 is illustratively the answering modem. For simplicity, the steps of dialing (in cellular modem 100), and answering (by PSTN modem 300), are not shown.

First, attention should be directed to FIG. 3. In step 705, cellular modem 100 enters training, e.g., representative phase "A," shown in FIG. 2. Following training phase "A," cellular modem 100 enters half-duplex training phase "B" in step 710. In this phase, cellular modem 100 is silent during portion "B1," as represented by step 715. After portion "B1," cellular modem 100 moves to phase "B2" to train its own echo canceler. In accordance with the preferred embodiment during phase "B2" cellular modem 100 first filters the received signal in step 720 to remove a pilot tone transmitted by far-end PSTN modem 300 (described below). Then, cellular modem 100 trains its echo cancelers on the filtered received signal in step 725. After half-duplex training portion "B2," cellular modem 100 enters full-duplex training phase "C" in step 730. After completion of training phase "C," cellular modem 100 enters the "DATA" phase in step 735.

Turning now to FIG. 4, corresponding steps are illustrated for PSTN modem 300, the answering modem. In step 805, PSTN modem 300 enters training, e.g., representative phase "A," shown in FIG. 2. Following training phase "A," PSTN modem 300 enters half-duplex training phase "B" in step 810. In portion "B1," PSTN modem 300 trains its own echo canceler in step 815. After portion "B1," PSTN modem enters phase "B2." However, in phase "B2" PSTN modem 300 is not silent, as in the prior art. Instead, PSTN modem 300 transmits a pilot tone to cellular modem 100 in step 820. For example, this pilot tone could illustratively be at a frequen-

cy of 300 Hz, at -20dBm, for the duration of the half-duplex training phase "B2." After half-duplex training portion "B2," PSTN modem 300 discontinues transmission of the pilot tone and enters full-duplex training phase "C" in step 825. After completion of training phase "C," cellular modem 100 enters the "DATA" phase in step 830.

The effect of the methods shown in FIGs. 3 and 4 on the representative training sequence is shown in FIG. 5. In particular, training phase "B2," is no longer half-duplex but full-duplex. However, to avoid the above-mentioned complexities involved with full-duplex training of an echo canceler, cellular modem 100 filters out the pilot tone from the received signal before training its echo canceler. As a result of the above, if the compander (not shown) of cell site transceiver 255 has the above-mentioned non-linearity, then the transmission of the pilot tone by PSTN modem 300 moves the compander into its linear range of operation. This results in the proper training of the echo canceler in cellular modem 100 so that once full-duplex transmission begins there is no gain change in the echo path.

Illustrative embodiments are shown in FIGs. 6 and 7 for cellular modem 100 and PSTN modem 300, respectively. Except for operative features of the embodiments, the operation of the various components is well-known.

As shown in FIG. 6, a binary input data sequence $\{x_k\}$ is provided by DTE 10 to cellular modem 100 on line 11. This input data sequence is processed by transmitter 605 to form a near-end transmitted signal, $ns(t)$. Illustratively, near-end transmitted signal, $ns(t)$, represents a quadrature amplitude modulated (QAM) signal. The near-end transmitted signal, $ns(t)$, is provided by hybrid 610 to mobile phone 140, via line 133. (It should be noted that during training, the binary input sequence is generated by cellular modem 100 as is known in the art. For simplicity, this alternate source of the binary data sequence is not shown.)

Transmitter 605 is under the control of CPU and memory 630, which is a microprocessor based central processing unit and associated memory for storing program data. It is assumed that transmitter 605 includes an encoder, shaping filter, digital to analog converter, etc., for processing and modulating the input data sequence on line 11 to provide the QAM signal, $ns(t)$, on line 606. As part of this processing of the input data sequence, transmitter 605 represents the input data sequence as a sequence of complex-valued symbols $\{a_n\}$, at nominal rate $1/T$ symbols per second. (This processing may also include scrambling, redundancy and other forms of encoding.) As can be seen from FIG. 3, this input data sequence is also used by far echo canceler 650 (described below). For simplicity, the local echo canceler is not shown.

Turning now to the other direction of communication, an analog line signal, $fs(t)$, transmitted from a far-end modem, e.g., PSTN modem 300, is received by hy-

brid 610 and is directed to bandpass filter (BPF) 620. This signal is referred to as the "far-end data signal," and utilizes the same frequency band as the transmitted signal, $ns(t)$, i.e., cellular modem 100 is a full-duplex modem. Bandpass filter 620 removes energy outside the signal passband from the far-end data signal, which is then converted to digital form by analog-to-digital (A/D) converter 625 to form received signal $rs(t)$.

The signal, $fs(t)$, reaching the input of bandpass filter 620 is corrupted by so-called echo signals. Echo signals are typically introduced at each four-to-two wire conversion in the communications system.

The far-end echo signal comprises transmit signal energy from cellular modem 100 which was transmitted towards PSTN modem 300 in the first instance but was reflected back to cellular modem 100 as a result of, for example, an impedance mismatch at a two-to-four wire conversion within PSTN 340. The received signal, $rs(t)$, provided by A/D converter 625, thus contains not only energy from the far-end data signal transmitted by PSTN modem 300, but also energy from the far-end echo signal.

In accordance with the preferred embodiment, the received signal, $rs(t)$, is applied to switch 640. The latter is under the control of the central processing unit of CPU and memory 630. During training phase "B2," the received signal, $rs(t)$, includes the above-described pilot tone. Therefore, in the above-mentioned step 720 of FIG. 3, the central processing unit of CPU and memory 630 causes the received signal, $rs(t)$, to be applied to notch filter 615 via switch 640. Notch filter 615 is a simple notch filter as known in the art and is designed to remove the above-described pilot tone from the received signal, $rs(t)$. As a result, far echo canceler 650 does not receive the pilot tone and trains on only the far-echo signal present in the received signal, $rs(t)$. After training far echo canceler 650, the central processing unit of CPU and memory 630 controls switch 640, in step 725 of FIG. 3, to remove notch filter 615 from the received signal path and applies received signal $rs(t)$ directly to far echo canceler 650.

Turning now to FIG. 7, an illustrative block diagram of a preferred PSTN modem 300 is shown. A binary input data sequence $\{x_k\}$ is provided by DTE 30 to PSTN modem 300 on line 31. This input data sequence is processed by transmitter 305 to form a near-end transmitted signal, $ns(t)$. Illustratively, near-end transmitted signal, $ns(t)$, represents a quadrature amplitude modulated (QAM) signal. The near-end transmitted signal, $ns(t)$, is provided by hybrid 310 to PSTN 340, via line 311. (It should be noted that during training, the binary input sequence is generated by PSTN modem 300 as is known in the art. For simplicity, this alternate source of the binary data sequence is not shown.)

Transmitter 305 is under the control of CPU and memory 330, which is a microprocessor based central processing unit and associated memory for storing program data. It is assumed that transmitter 305 includes

an encoder, shaping filter, digital to analog converter, etc., for processing and modulating the input data sequence on line 31 to provide the QAM signal, $ns(t)$, on line 306. As part of this processing of the input data sequence, transmitter 305 represents the input data sequence as a sequence of complex-valued symbols $\{a_n\}$, at nominal rate $1/T$ symbols per second. (This processing may also include scrambling, redundancy and other forms of encoding.)

PSTN modem 300 includes means for generating the above-mentioned pilot tone, i.e., pilot tone generator 315 and switch 370. During training phase "B2," PSTN modem 300 transmits this pilot tone to cellular modem 100. In particular, during the above-mentioned step 820, the central processing unit of CPU and memory 330 controls switch 370, via line 382, to apply the pilot tone for transmission to cellular modem 100. After training phase "B2" has ended, the central processing unit of CPU and memory 330 controls switch 370 to apply the output signal from transmitter 305 to hybrid 310. As a result, PSTN modem 300 is not silent during the half-duplex portion of the training signal as in the prior art.

It should be noted that although an illustrative switch is shown in FIGs. 6 and 7 for the purposes of description, those in the art would realize that modifications to corresponding algorithms in a digital signal processor (not shown) would be equivalent. For example, in FIG. 7 transmitter 305 represents a digital signal processor that is programmed to provide corresponding handshaking signaling. As a result,

transmitter 305 is simply reprogrammed to generate the above-mentioned pilot tone during training phase "B2." Further, it should be noted that although the preferred embodiment was described in the context of a called, or answering, modem providing the pilot tone, it can also be used in a calling, or originating, modem providing the pilot tone to the answering modem, which now filters out the pilot tone to train its echo canceler. This case is illustrated in FIGs. 8 - 10.

Although the preferred embodiment is described as being implemented with discrete functional building blocks, e.g. an echo canceller, etc., the functions of any one or more of those building blocks can be carried out using one or more appropriate programmed processors, e.g. a digital signal processor.

In addition, although the preferred embodiment was described in the context of a cellular data connection this invention is applicable to the PSTN network. Also, although the preferred embodiment was described in the context of using a pilot tone, other signals can be used so long as the signal causes the above-mentioned compander to enter the linear range of operation and the receiver can appropriately cancel this signal before training its echo canceller. Those skilled in the art would realise that although shown in the context of a hybrid, some cellular modems have a four-wire interface to the cellular transceiver. In addition, it should be realised that the preferred embodiment could be selectively enabled

by a user via use of the well-known "AT-command set".

The disclosures in United States patent application no. 08/536,916, from which this application claims priority, and in the abstract accompanying this application are incorporated herein by reference.

5

lot signal is transmitted during a portion of the handshaking and training sequence in which the opposite data communications equipment trains an echo canceller thereof; and communicating data in a data phase (735) of the data connection subsequent to the handshaking and training step.

Claims

1. Data communications equipment comprising transmitter circuitry (605) operable to communicate a training sequence with an opposite data communications equipment to establish a data connection; wherein the transmitter circuitry is operable to generate a signal during that portion of the training sequence in which the opposite data communications equipment trains its echo canceller. 10
2. Data communications equipment comprising an echo canceller (650) operable to be trained during an echo-canceller training phase of a training sequence with a far-end data communications equipment; and a filter (615) operable to filter a received signal during the echo-canceller training phase to remove a signal transmitted by the far-end data communications equipment before application of the received signal to the echo canceller to train the echo canceller on an echo signal component thereof. 15
3. Apparatus as in claim 2, comprising transmitter circuitry (605) operable to transmit a training signal during a half-duplex training phase to act as a source for the echo signal. 20
4. Apparatus as in claim 2 or 3, wherein the filter (615) is operable to remove a tone signal transmitted by the far-end data communications equipment. 25
5. A method of training an echo canceller (650) during a training sequence of a data connection, the method comprising the steps of transmitting (705) a training signal to a far-end data communications equipment; receiving (710) a signal comprising an echo signal of the training signal and a pilot signal transmitted by the far-end data communications equipment; filtering (720) the received signal to remove the pilot signal to provide a filtered signal; and training (725) the echo canceller on the filtered signal. 30
6. A method as in claim 5, wherein the pilot signal is a tone. 35
7. A method of training an echo canceller (650) during a training sequence of a data connection, the method comprising the steps of performing a handshaking and training sequence (705,710) with an opposite data communications equipment in which a pi- 40

8. A method as in claim 7, wherein the pilot signal is a tone. 45

50

55

FIG. 1

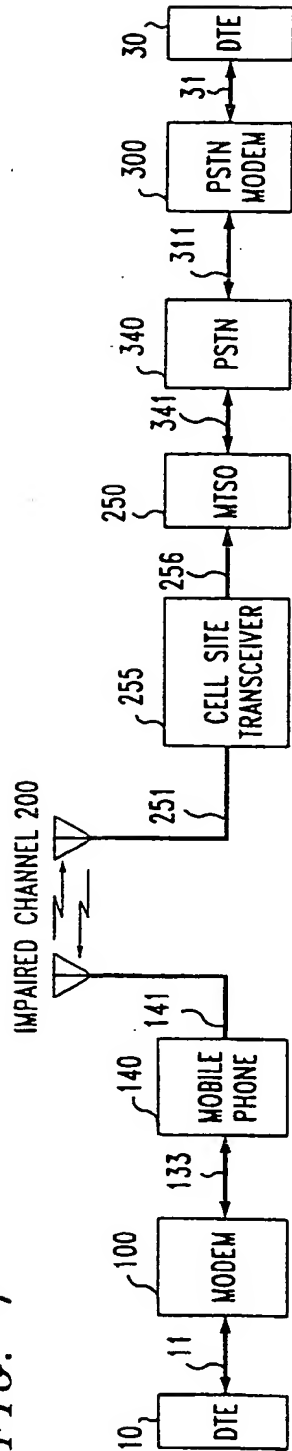


FIG. 2

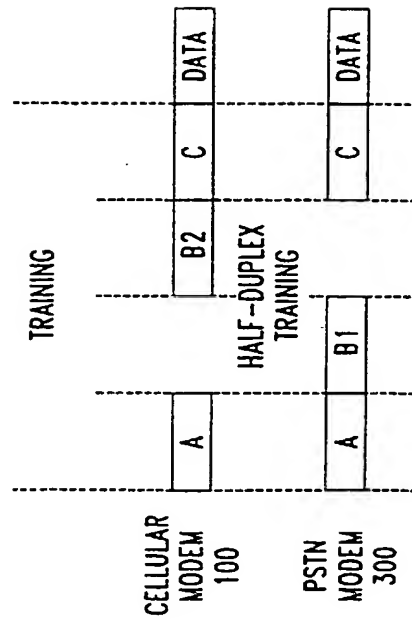
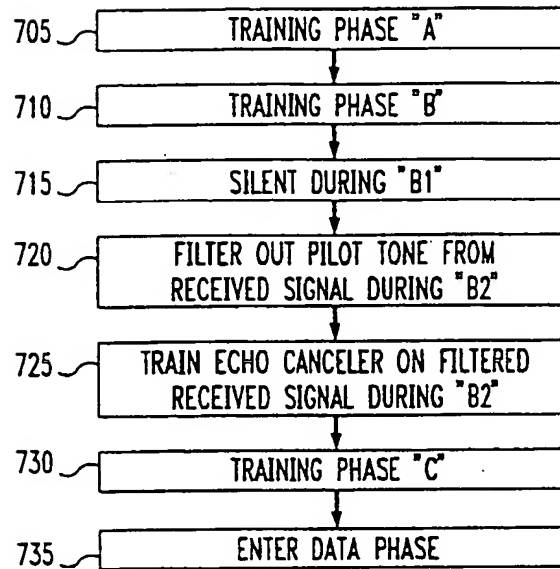


FIG. 3

CELLULAR ORIGINATING MODEM

*FIG. 4*

PSTN ANSWERING MODEM

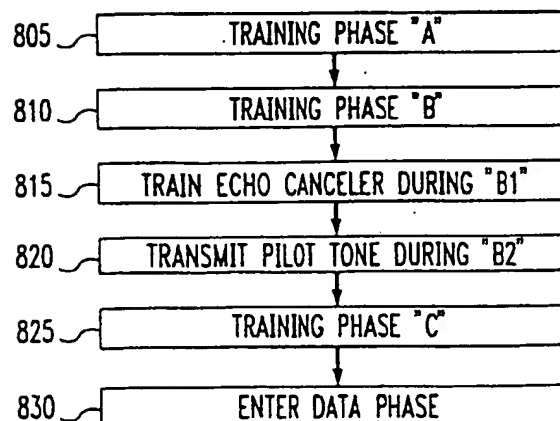


FIG. 5

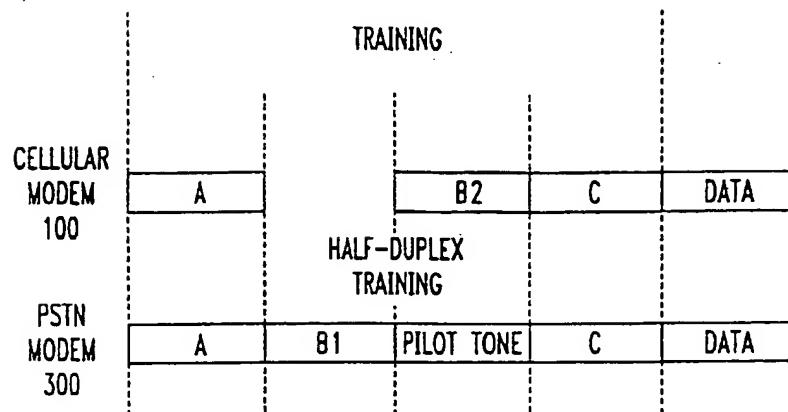


FIG. 6

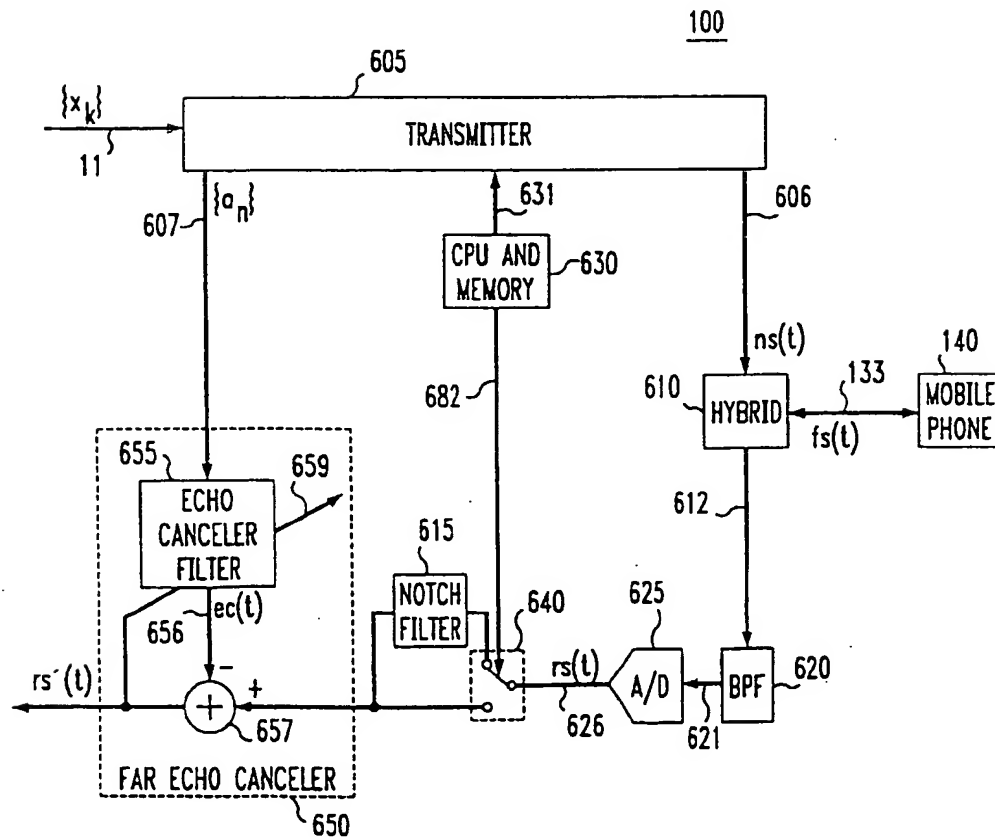


FIG. 7

300

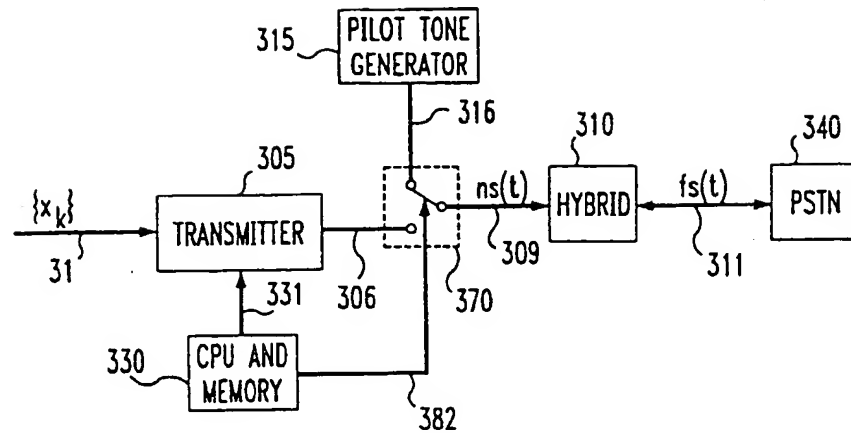


FIG. 8

CELLULAR ANSWERING MODEM

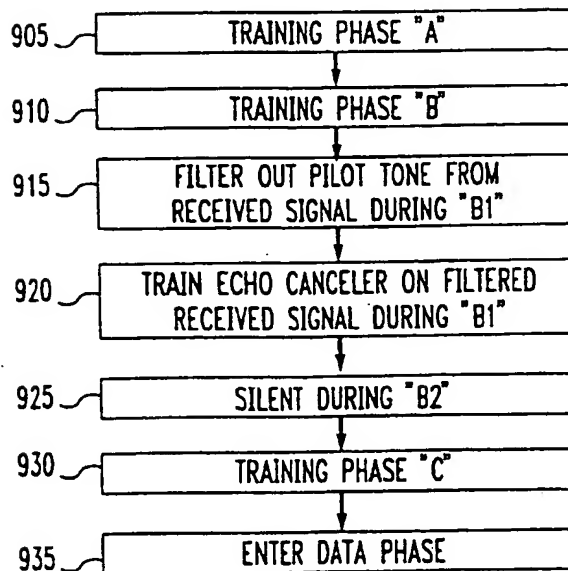


FIG. 9

PSTN ORIGINATING MODEM


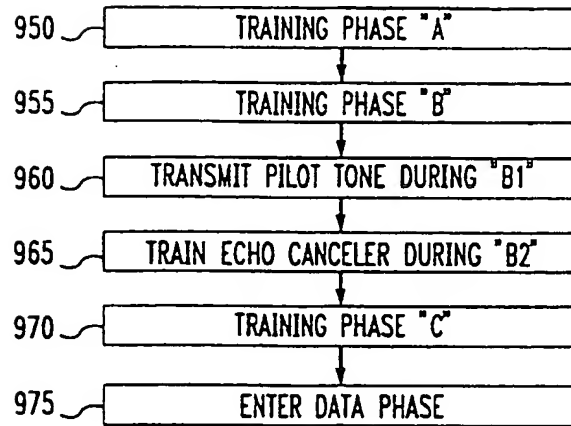


FIG. 10



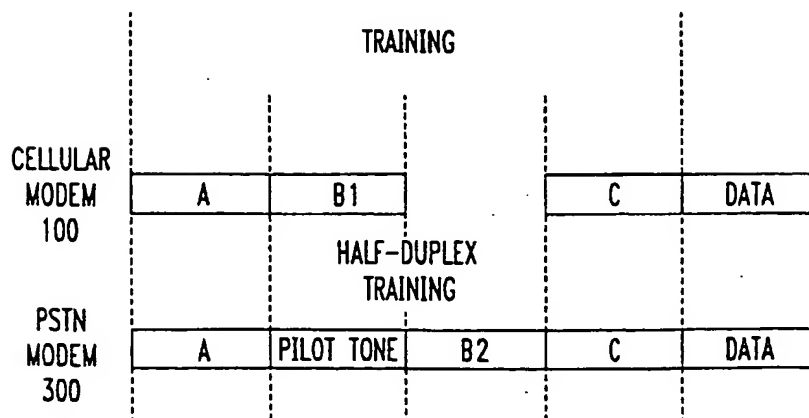

(12) EUROPEAN PATENT APPLICATION

(88) Date of publication A3:
09.12.1998 Bulletin 1998/50

(51) Int Cl. 6: H04B 3/23

(43) Date of publication A2:
02.04.1997 Bulletin 1997/14

(21) Application number: 96307072.7

(22) Date of filing: 27.09.1996

(84) Designated Contracting States:
DE ES FR GB IT

(30) Priority: 29.09.1995 US 536916

(71) Applicant: Paradyne Corporation
Largo, Florida 33779-2826 (US)

(72) Inventors:
• Betts, William Lewis
St. Petersburg, Florida 33703 (US)

• Hazen, Ramon B.
North Redington Beach, Florida 33708 (US)
• Scott, Robert Earl
Indian Rocks Beach, Florida 34635 (US)


(74) Representative: Jehan, Robert et al
Williams, Powell & Associates,
4 St Paul's Churchyard
London EC4M 8AY (GB)

(54) Echo canceller using initial training

(57) A far-end modem (300) transmits a "pilot tone" during the time that a near-end modem (100) is training its echo canceller (650). Correspondingly, the near-end

modem (100) is modified to notch or filter out this pilot tone from the received signal. The filtered received signal is then used by the near-end modem (100) to train its echo canceller (650).

FIG. 6

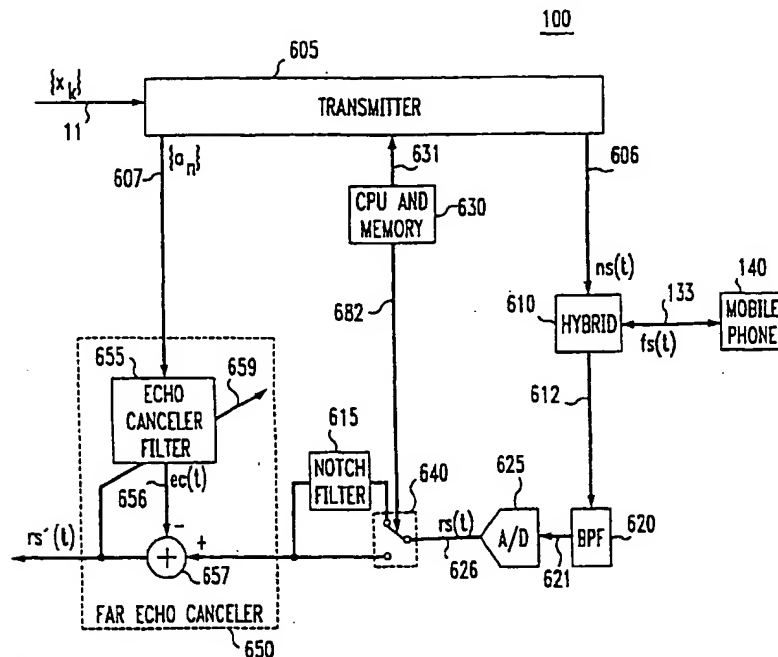



European Patent
Office

EUROPEAN SEARCH REPORT

Application Number
EP 96 30 7072

DOCUMENTS CONSIDERED TO BE RELEVANT			
Category	Citation of document with indication, where appropriate, of relevant passages	Relevant to claim	CLASSIFICATION OF THE APPLICATION (Int.Cl.6)
X	EP 0 605 107 A (AT & T CORP) 6 July 1994 * column 1, line 47 - column 2, line 5 * * column 7, line 23 - line 35 * * column 7, line 51 - column 8, line 1 * ---	1,8	H04B3/23
X	EP 0 391 715 A (CODEX CORP) 10 October 1990 * page 3, line 4 - line 15 * -----	1	
			TECHNICAL FIELDS SEARCHED (Int.Cl.6)
			H04B H04M
The present search report has been drawn up for all claims			
Place of search THE HAGUE		Date of completion of the search 20 October 1998	Examiner De Iulius, M
CATEGORY OF CITED DOCUMENTS X : particularly relevant if taken alone Y : particularly relevant if combined with another document of the same category A : technological background O : non-written disclosure P : intermediate document		T : theory or principle underlying the invention E : earlier patent document, but published on, or after the filing date D : document cited in the application L : document cited for other reasons & : member of the same patent family, corresponding document	

EPO FORM 1503 03 82 (P/4C01)